



# Australia and New Zealand Broadcast Beam

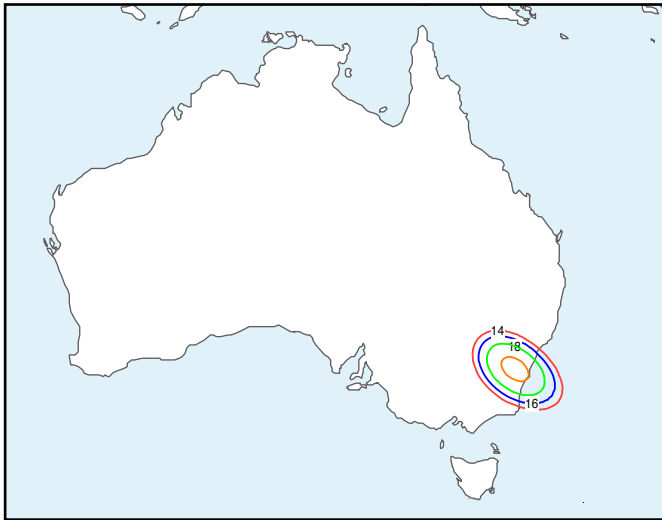

Uplink Contour

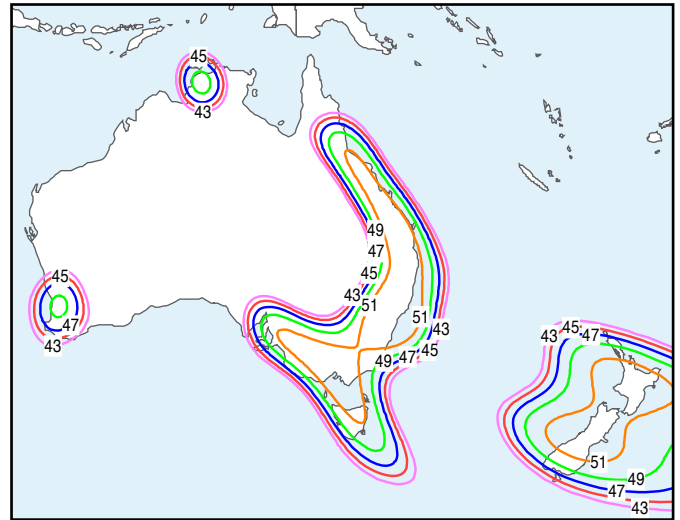

Downlink Contour

Geographic Coverage	Australia and New Zealand
Frequency Range	Uplink (H): 13.775 - 13.975 GHz Downlink (V): 11.500 - 11.700 GHz
Transponder Bandwidth	200 MHz
EIRP at operation back-off -4 dB (at peak) per 200 MHz	53.6 dBW
G/T at peak	20.4 dB/K
Equivalent Capacity*	DVB-S1: 153 Mbps DVB-S2: 166 Mbps

**Thaicom-4 (IPSTAR)  
Broadcast Solutions**

- Direct to Home (DTH) Service
- High Definition TV (HDTV)
- Backhaul and Backup Link for TV/Cable Operator

\*Equivalent Capacity is calculated based on

- DVB technology
- Modulation Code: QPSK 1/2
- 7.6m Ku-band Uplink Antenna



**Thaicom-4 (IPSTAR) Description**

Orbital Location	119.5° East
Launch Date	11 August 2005
Life Expectancy	At least 12 Years

[www.ipstar.com](http://www.ipstar.com)